



CONTACT

MUMBAI OFFICE

Hind Saurashtra Industrial Co-op.
Society Ltd,
Unit No.b-17,marol Naka
Andheri Kurla Road,
Andheri (e),mumbai-400059
Tel : 022-28500275/276
sanfieldmumbai@sanfieldindia.in

HEAD OFFICE BHOPAL

13-A & 12-D - Sector-D
Industrial Area,Govindpura,
Bhopal – 462 023, India.
Tel : 0755-4233535(30 Lines)
26062661/662
Fax : 0755-4270730,
sanfield@sanfieldindia.in

DELHI OFFICE

B-7, 2nd Floor, South Extension - II,
New Delhi – 110 049
Tel : 011- 46026903
sanfielddelhi@sanfieldindia.in

AHMEDABAD

sanfieldahmedabad@sanfieldindia.in
+918980314418

CHENNAI

sanfieldchennai@sanfieldindia.in
+919840165062

HYDERABAD

sanfieldhyderabad@sanfieldindia.in
+919977271110

BANGALORE

sanfieldbangalore@sanfieldindia.in
+9180500 10502

SIL LIFTING ANCHOR

Sanfield [India] Limited.



Sanfield® Lifting Anchors are engineered and rigorously tested under the strictest quality assurance policy, providing the safest, yet cost competitive solution to the building industry.

Our extensive range of Lifting Anchors includes:

- Face Lifting Anchors
- Eye Anchors
- Edge Lift & Hairpin Anchors
- Lifting Clutches

Our wide range of Lifting Anchors are able to cater for the most demanding technical, design and application requirement.

Facelift Anchors



Clutches



Recess Formers




Our Lifting Anchors Load Capacity ranges from 1,300Kg to 10,000kg and above .


Facelift Anchors



Concrete recess formed by casting of **SIL** Recess Formers



Foot of Facelift Anchor embedded into concrete. Tensile forces upon the anchor would result in a conical concrete resistance.

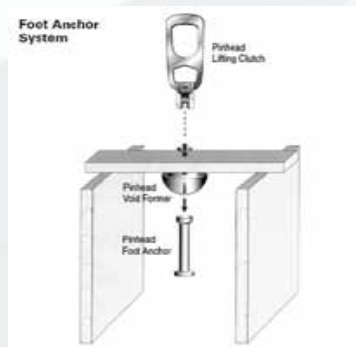

No.	Load Group	Load Capacity (kg)	Length (mm)
1FA065	1.3T	1,300	65
1FA120	1.3T	1,300	120
2FA075	2.5T	2,500	75
2FA090	2.5T	2,500	90
2FA120	2.5T	2,500	120
2FA170	2.5T	2,500	170
4FA210	2.5T	2,500	210
5FA095	5.0T	5,000	95
5FA120	5.0T	5,000	120
5FA240	5.0T	5,000	240
5FA340	5.0T	5,000	340
7FA540	7.0T	7,000	540
7FA300	7.0T	7,000	300
10FA115	10T	10,000	115
10FA135	10T	10,000	135
10FA150	10T	10,000	150
10FA170	10T	10,000	170
10FA340	10T	10,000	340
10FA680	10T	10,000	680

Recess Formers

A Recess Former is adapted for forming a recess around the head of an anchor element which is embedded in the concrete element during casting. The recess former has an outer curved surface extending from a flat base surface. The outer surface has a hole at its apex to allow the anchor to extend out of the recess former. **Sanfield** Recess Formers are made of highly durable rubber encasing a high tensile steel bolt, conforming to many international standards. Its durable rubber case allows easy and clean removal.

Recess Formers

No	Description	Load Group
1RRFRO	Rubber Round	1.3T
2RRFRO	Rubber Round	2.5T
5RRFRO	Rubber Round	5T
7RRFRO	Rubber Round	7.5T
10RRFRO	Rubber Round	10T



Clutches

No	Description	Load Group	Load Capacity (kg)
1LE	Swiftlift Clutch	1.3T	1,300kg
2LE	Swiftlift Clutch	2.5T	2,500kg
5LE	Swiftlift Clutch	5T	5,000kg
10LE	Swiftlift Clutch	10T	10,000kg



Application Examples:

